

ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN SCISSOR LIFT

Performance

| | | |
|---|---------------|-----------|
| Platform Height—Elevated | | |
| ERT2669 | 26'2" | 8 m |
| ERT3369 | 32'8" | 10 m |
| ERT4069 | 40'3" | 12.3 m |
| ERT4769 | 47' | 14.3 m |
| Platform Height — Lowered | | |
| ERT2669 | 4'3" | 1.3 m |
| ERT3369 | 4'9" | 1.5 m |
| ERT4069 | 4'10" | 1.5 m |
| ERT4769 | 5'4" | 1.6 m |
| Platform Capacity (Single Extension) | | |
| ERT2669 | 1,500 lb | 680 kg |
| ERT3369 | 1,000 lb | 453.59 kg |
| ERT4069 | 800 lb | 363 kg |
| ERT4769 | 800 lb | 363 kg |
| — Capacity on Deck Extension | 300 lb | 136 kg |
| No. Occupants (Indoor/Outdoor) | | |
| ERT2669 | 4/4 | |
| ERT3369 | 4/2 | |
| ERT4069 | 3/2 | |
| ERT4769 | 3/2 | |
| Lift/Lower Time | | |
| ERT2669 | 36/28 seconds | |
| ERT3369 | 42/33 seconds | |
| ERT4069 | 69/46 seconds | |
| ERT4769 | 81/55 seconds | |
| Maximum Drive Height | Full Height | |
| Weight (single extension w/out leveling jacks)* | | |
| ERT2669 | 8,627 lb | 3,913 kg |
| ERT3369 | 9,427 lb | 4,276 kg |
| ERT4069 | 10,560 lb | 4,790 kg |
| ERT4769 | 13,636 lb | 6,194 kg |
| Drive Speed—Lowered | 3.5 mph | 5.6 km/h |
| Drive Speed—Elevated | 0.5 mph | 0.8 km/h |
| Max Tilt Rating (side-to-side) | 2.5 Degrees | |
| Max Tilt Rating (fore & aft) | 3 Degrees | |
| Gradeability | | |
| ERT2669 | 40% | |
| ERT3369 | 40% | |
| ERT4069 | 35% | |
| ERT4769 | 30% | |
| Turning Radius (Inside) | 83" | 2 m |
| Turning Radius (Outside) | 175" | 4 m |

* Certain options or country standards will increase weight.

Standard Specifications

Power Source

| | |
|-------------|-------------------|
| Drive (2WD) | AC Electric Drive |
|-------------|-------------------|

Tires

| | |
|-------------------------|---------------------|
| Tire size (non-marking) | 26 x 12 Foam Filled |
|-------------------------|---------------------|

Hydraulic System

| | |
|---------------------|----------------|
| Hydraulic Reservoir | 13.2 gal (50L) |
|---------------------|----------------|



Standard Features

- 42in Roll-out Deck Extension
- Moveable, Removable Platform Console Box
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable¹
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tires
- 110V-AC Receptacle In Platform
- 23 Amp Automatic, SCR Battery Charger
- 8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 310 Amp-Hour Batteries (ERT4069)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4769)
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- 2WD AC Drive System
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness

Accessories & Options

- Hydraulic Leveling Jacks (Auto Level)
- 26 x 12 Foam Filled Lug Tread Tires
- 8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4069)
- Flashing Amber Beacon - LED
- Dual Flashing Amber Beacons - LED
- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- Generator Set (Kubota Stage V OC60-E4) 6hp (4.5kW)
- Heavy Duty Pipe Racks

1. ERT4769 Includes a Push-Button Manual Descent System

<< go back

ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN SCISSOR LIFT


AERIAL TITANS

866-874-0584
WWW.AERIALTITANS.COM



Dimensions

All dimensions are approximate.

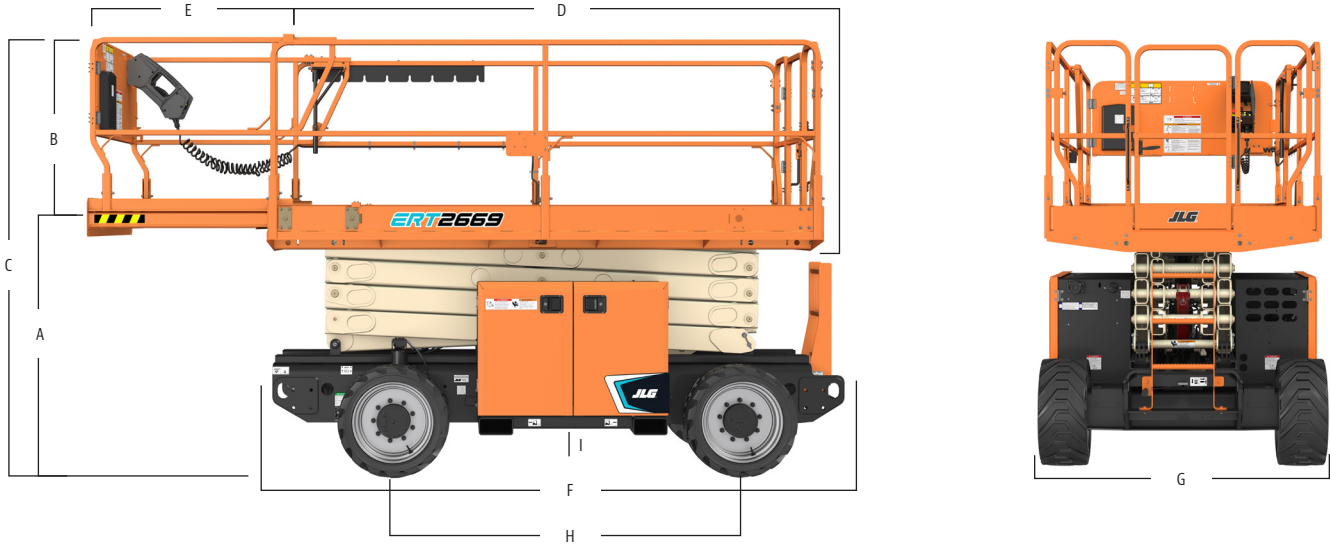

Platform Height — Elevated

| | | |
|---------|-------|--------|
| ERT2669 | 26'2" | 7.98 m |
| ERT3369 | 32'8" | 9.96 m |
| ERT4069 | 40'3" | 14.1 m |
| ERT4769 | 47' | 14.3 m |

A. Platform Height - Lowered

| | | |
|---------|-------|--------|
| ERT2669 | 4'3" | 1.3 m |
| ERT3369 | 4'9" | 1.46 m |
| ERT4069 | 4'10" | 1.46 m |
| ERT4769 | 5'4" | 1.62 m |

B. Platform Railing Height*

| | | |
|---------|-------|--------|
| ERT2669 | 44.7" | 1.14 m |
|---------|-------|--------|

C. Overall Height

| | | |
|---------|--------|--------|
| ERT2669 | 96.7" | 2.46 m |
| ERT3369 | 102.9" | 2.61 m |
| ERT4069 | 103" | 2.62 m |
| ERT4769 | 109.1" | 2.77 m |

D. Platform Dimensions

| | | |
|---------|--------------|-------------|
| ERT2669 | 130.5" x 63" | 3.3 x 1.6 m |
|---------|--------------|-------------|

E. Platform Extension

| | | |
|---------|-----|--------|
| ERT2669 | 42" | 1.07 m |
|---------|-----|--------|

F. Overall Machine Length

| | | |
|---------|------|--------|
| ERT2669 | 139" | 3.53 m |
|---------|------|--------|

G. Overall Machine Width

| | | |
|---------|-------|--------|
| ERT2669 | 69.3" | 1.76 m |
|---------|-------|--------|

H. Wheelbase

| | | |
|---------|-------|--------|
| ERT2669 | 81.3" | 2.07 m |
|---------|-------|--------|

I. Ground Clearance

| | | |
|---------|-------|---------|
| ERT2669 | 10.1" | 25.7 cm |
|---------|-------|---------|

*Fold Down Rails

AERIAL TITANS

866-874-0584
WWW.AERIALTITANS.COM

Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification.

<< go back

The JLG "1 & 5" Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.

Part No.: 3131510
R0920
Printed in USA



JLG Industries, Inc.

1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417
www.jlg.com

An Oshkosh Corporation Company