


# ELECTRIC ROUGH TERRAIN SCISSOR LIFT

**PULSEO**  
GENERATION

**TESMAX**



## HIGH PERFORMANCE & ROUGH TERRAIN CAPACITIES

- > Driveable at full height
- > Platform capacity of 750 kg
- > Drive axle with manual locking rear differential increases ground traction

## FULL ELECTRIC DRIVE

- > Silent & clean operations
- > Versatile use : outdoor/ indoor
- > Smooth & proportional movements

## MAINTENANCE AND SERVICE-ORIENTED

- > Activ'Screen: on-board configuration & diagnostic interface
- > Easy access to components
- > Activ'Energy Management takes care of your battery

## EXTENDABLE DUTY CYCLES

- > Quick and various charging possibilities
- > Optional & removable Range Extender with low fuel consumption

# HS18 E MAX


## AERIAL TITANS

### ELECTRIC ROUGH TERRAIN SCISSOR LIFT

#### TECHNICAL DATA

##### HS18 E MAX

Working height	18 m
Platform height	16 m
Max. drive working height	18 m
Lift capacity	750 kg (4 pers.)
Lift capacity on the extension	225 kg
<b>A</b> Platform length	3.93 m
Platform length - extended	5.89 m
Length - extension	0.98 m
<b>B</b> Platform width - outside	1.89 m
<b>C</b> Height - stowed	3.15 m
Height - guardrails lowered	2.36 m
<b>D</b> Overall width	2.3 m
<b>E</b> Length	4.4 m
<b>F</b> Wheelbase	2.76 m
<b>G</b> Ground clearance	30.7 cm
Drive speed	5 km/h
Gradeability	40 %
Tilt (longitudinal / lateral)	3.5° / 1.5°
Turning radius - outside	6.75 m
Tyres	830 x 285 mm
Batteries	8 x 6 V - 435 Ah (C20)
Weight	8 048 kg

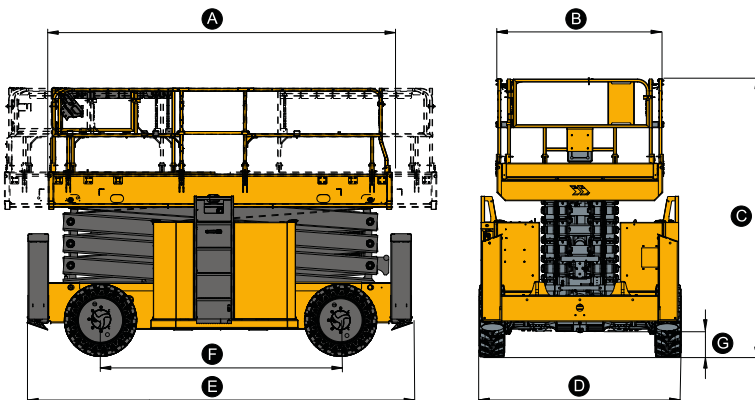


#### STANDARD EQUIPMENT

- > Haulotte Activ'Screen
- > Haulotte Activ'Energy Management: smart battery management system
- > 4 wheel drive
- > AC motors
- > 48V battery pack
- > L platform with dual extensions (5.89m)
- > Two drop bar entries
- > Folding guardrails
- > Mechanical axle with manual locking rear differential
- > Outriggers with automatic or individual set up

#### OPTIONS AND ACCESSORIES

- > Haulotte Activ'Shield Bar
- > Haulotte Activ'Lighting System
- > Range Extender 5.5 kW - Stage 5 (+250 kg)
- > Accelerated charger (380 V)
- > AC power to platform plug (110 / 230 V)
- > Double swing gate entries
- > Material handling rack
- > Work light
- > Non marking tires
- > Automatic battery water-filling system
- > Cold & arctic weather kits
- > Platform lighting
- > Telematics solutions

Certain options increase the machine weight

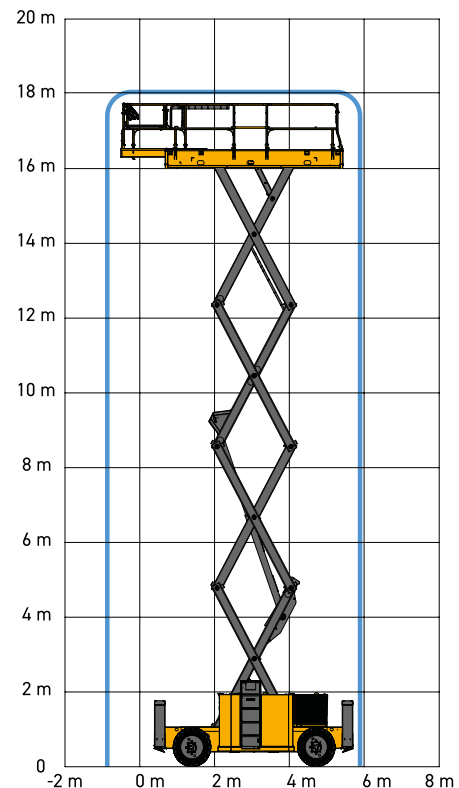

# AERIAL TITANS

866 874-0584 AERIALTITANS.COM